


MODEL 25/1

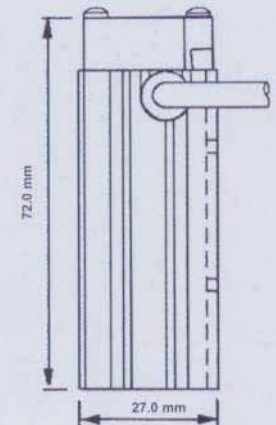

MODEL 25/2

Cirrus 25		25/1			25/2			
Nominal Power Output at 10°C, 12V or 230V *		5W	10W	15W	10W	20W	30W	40W
Rated fan current at 12V, amps		0.06	0.06	0.06	0.06	0.06	0.06	0.06
Typical max inrush current	at 12V, amps	1	2	3	1	2	3	4
	at 24V, amps	1	2	3	2	4	5	11
	at 115V, amps	n/a	n/a	n/a	n/a	1	1	2
	at 230V, amps	n/a	n/a	n/a	n/a	3	5	7
Fan volumetric flow, approximate cfm		1.6	1.6	1.6	1.6	1.6	1.6	1.6
Fan lifetime at 50°C MTBF, hours		82,000	82,000	82,000	82,000	82,000	82,000	82,000
Input Voltage	- fan DC	12	12	12	12	12	12	12
	- heater	12/24	12/24	12/24	12/24	12/24	12/24	12/24
						100-240	100-240	100-240
Dimensions	- cross section mm	26x27	26x27	26x27	26x27	26x27	26x27	26x27
	- length of profile and fan	50	50	50	72	72	72	72
Outlet Finger Guard (High Voltage supply)		n/a	n/a	n/a	n/a	Y	Y	Y
Outlet Finger Guard (Low Voltage supply)		Option	Option	Option	Option	Option	Option	Option

Options

Finger Guard at outlet

Smartcon® Cable to allow AC fan supply and/or 24V fan supply

Fixinas - DIN clip

* Other power outputs available on request.

Data is given for illustrative purposes only and does not release the customer from independent application tests.

This information is subject to change without notice.



European Thermodynamics Limited
Intelligent Thermal Management

PO Box 6744
Leicester LE2 6WS, United Kingdom

Tel: +44 (0)116 292 1501
Fax: +44 (0)116 292 1503
info@etdyn.com
www.etdyn.com

Business registration 4345086

VAT registration 787 3265 86

